

alula™ RE603 Panic Pendant Connect+™ Encrypted



The RE603 Panic Pendant is a supervised portable device used to trigger a panic alarm.

Features


- Water resistant housing
- Low battery indication
- Secure encrypted wireless transmissions
- Can be worn with a lanyard or wristband
- 2-year warranty



Enroll the panic by placing the panel into wireless enrollment mode and pressing the red panic button. Alternatively, the panic can be enrolled by scanning its bar code using the Connect+ Installer App or by entering its 8-character serial number on the interactive service provider's web portal.

Operate by pressing the red panic button until the LED starts flashing.

Wear using the included lanyard or wristband. Note: To install the wristband you must first remove the clear plastic tube used to attach the lanyard.

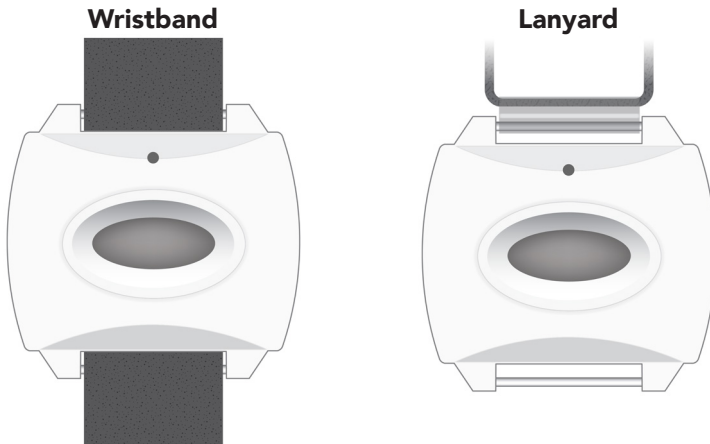

Use the panel installation guide to verify proper system setup.

Specifications

Physical	
Housing Dimensions	1.5 x 1.2 x .6 inches (3.8 x 3.0 x 1.5 centimeters)
Weight with Battery	0.6 ounces (18 grams)
Environmental	
Operating Temperature	32°F to 120°F (0°C to 49°C)
Maximum Humidity	85% non-condensing relative humidity
Sensor Specifications	
Frequency	433.92 MHz
Replacement Battery	One Panasonic CR1632
Nominal Battery Life	4-6 Years
Transmitted Indications	Low Battery, Panic, Supervision
Certification	
RE603	FCC, IC, RCM, EN 60950-1, EN 300 220, EN 301 489, CE Security Grade 2, CE Environmental Class 2

Specifications subject to change without notice

WARRANTY

Alula will replace all non-portable products that are defective in their first five (5) years, and all portable products that are defective in their first two (2) years.

TRADEMARKS

Alula and Connect+ are trademarks owned by Alula Holdings, LLC.

IC NOTICE

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference, and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux cnr d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) L'appareil ne doit pas produire de brouillage, et
- (2) L'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

IC: 8310A-RE603

FCC NOTICE

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference that may be received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by Alula could void the user's authority to operate this equipment.

FCC ID: USX-RE603

CE DECLARATION OF CONFORMITY

Hereby, Alula declares that this RE603 is in compliance with the essential requirements and other relevant provisions of directive 1999/5/EC.

(This declaration can be translated to other languages via a myriad of translation tools found on the Internet.)